

NOTES:

THIS DRAWING MUST NOT BE SCALED.

THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, DATUMS, AND LEVELS PRIOR TO COMMENCEMENT OF WORK. ALL ERRORS AND OMISSIONS TO BE REPORTED TO THE CONTRACT ADMINISTRATOR BEFORE PROCEEDING.

WORKINGS AND MODIFICATIONS TO WORK SHOWN ON THESE DRAWINGS SHALL NOT BE CARRIED OUT WITHOUT WRITTEN PERMISSION OF THE CONTRACT ADMINISTRATOR.

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF NUMBER TEN ARCHITECTURAL GROUP AND THE COPYRIGHT IN THE SAME BEING RESERVED TO THEM. IT MAY BE REPRODUCED ONLY WITH THE PERMISSION OF THE CITY OF WINNIPEG.

- EXTERIOR WALL TYPES:**
- MASONRY CLAD EXTERIOR WALL**
 - CLAY MASONRY
 - C/W ANTI-GRAFFITI COATING FULL HEIGHT
 - 25 AIR SPACE
 - 100 RIGID INSULATION (R51 3.5, R20)
 - ELASTOMERIC AIR/VAPOUR BARRIER
 - 13 EXTERIOR GWS
 - 150 STL STUDS @ 400 O/C
 - 16 GWS
 - MASONRY CLAD EXT. WALL W/ CMU BACK-UP**
 - CLAY MASONRY
 - C/W ANTI-GRAFFITI COATING TO FULL HEIGHT
 - 25 AIR SPACE
 - 100 RIGID INSULATION (R51 3.5, R20)
 - ELASTOMERIC AIR/VAPOUR BARRIER
 - 190 CONCRETE BLOCK TO 2800mm AFF
 - ABOVE 2800mm AFF:
 - 13 EXTERIOR GWS
 - 150 STL STUDS @ 400 O/C
 - 16 GWS
 - CEMENT-FIBRE SIDING EXTERIOR WALL**
 - PRC-PRIMER, CUSTOM FINISHED CEMENT-FIBRE
 - HORIZONTAL LAP SIDING, 203mm EXPOSURE
 - 100 RIGID INSULATION (R51 3.5, R20) SECURED W/ VERTICAL CHANNELS @ 400 O/C
 - ELASTOMERIC AIR/VAPOUR BARRIER
 - 13 EXTERIOR GWS
 - 150 STL STUDS @ 400 O/C
 - 16 GWS
 - CEMENT/ACRYLIC STUCCO EXTERIOR WALL**
 - 25 CEMENT STUCCO W/ ACRYLIC FINISH, SMOOTH
 - TEXTURE FINISH C/W ANTI-GRAFFITI COATING
 - EXPANDED METAL MESH
 - AIR BARRIER
 - 100 RIGID INSULATION (R51 3.5, R20) SECURED W/ HORIZONTAL CHANNELS @ 305 O/C
 - ELASTOMERIC AIR/VAPOUR BARRIER
 - 13 EXTERIOR GWS
 - 150 STL STUDS @ 400 O/C
 - 16 GWS
 - REFUSE ENCLOSURE**
 - 190 CONCRETE BLOCK TO 2000mm AFF
 - CLAY MASONRY TO 2000mm AFF
 - C/W ANTI-GRAFFITI COATING FULL HEIGHT
 - CONCEALED WALL PROTECTION**
 - PROVIDE 13 WATERGARD BEHIND INTERIOR GWS TO 2800 AFF, INDICATED THUS, (*)
 - REFER TO DETAIL 1/A-4.2

- ROOF TYPES:**
- TYPICAL ROOF CONSTRUCTION (R30)**
 - 2 PLY TORCH-ON MEMBRANE
 - 3 TORCHABLE PROTECTION BOARD
 - TAPERED INSULATION WHERE SHOWN ON A-1.2
 - 150 RIGID INSULATION (R51 5.3, R30)
 - AIR/VAPOUR BARRIER
 - 13 EXTERIOR GWS
 - 38 STEEL DECK
 - OPEN WEB STEEL JOISTS
 - NOTE: (*) INDICATES 38 ACUSTIC STEEL DECK
 - C/W INSULATION, REFER TO STRUCTURAL FOR EXACT EXTENT AND LOCATION
 - OTHER ROOF CONSTRUCTION (R30)**
 - 2 PLY TORCH-ON MEMBRANE
 - 3 TORCHABLE PROTECTION BOARD
 - TAPERED INSULATION WHERE SHOWN ON A-1.2
 - 150 RIGID INSULATION (R51 5.3, R30)
 - AIR/VAPOUR BARRIER
 - 38x140 TAG FIR DECKING, PRC-FIN CLEAR
 - STEEL CHANNEL JOISTS
 - NOTE: REFER TO STRUCTURAL FOR EXACT EXTENT AND LOCATION

- FLOOR TYPES:**
- TYPICAL MAIN FLOOR CONSTRUCTION**
 - FLOOR FINISH AS SCHEDULED
 - REN STRUCTURAL CONC SLAB - SEE STRUCT
 - VOID FORM - SEE STRUCT
 - NOTE: REFER TO STRUCTURAL/MECHANICAL FOR EXTENT OF RADIANT IN-FLOOR HEATING
 - TYPICAL MEZZ. FLOOR CONSTRUCTION**
 - FLOOR FINISH AS SCHEDULED
 - 50 CONC TOPPING
 - 200 PRE-CAST CONC HOLLOW-CORE
 - CEILING FINISH AS SCHEDULED
 - NOTE: REFER TO STRUCTURAL/MECHANICAL FOR EXTENT OF RAISED HOUSEKEEPING PADS

numberTEN architectural group


WINNIPEG MB 204 462 0991

WILHELM BC 200 583 5165

architecture • interior design • graphic design

1	ISSUED FOR 40% REVIEW	28-OCT-2007
2	ISSUED FOR CLASS 'X' OPINION OF PROBABLE COSTS	28-NOV-2007
3	ISSUED FOR 80% REVIEW	7-DEC-2007
4	ISSUED FOR 100% REVIEW	11-JAN-2008
5	ISSUED FOR TENDER	18-JAN-2008
6		
7		
8		
9		

NO.	REVISION/DESCRIPTION	DATE

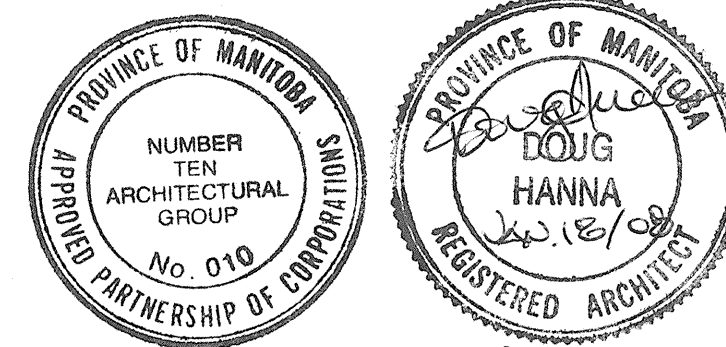

DRAWN BY	GD	CHECKED BY	DH	APPROVED
DATE	18-JAN-2008	USER APPROVAL		

CITY OF WINNIPEG
 PLANNING, PROPERTY &
 DEVELOPMENT DEPARTMENT
 CIVIC ACCOMMODATIONS DIVISION
 300 - 65 GARRY ST. R3C 4K4

PROJECT
 BRONX PARK COMMUNITY CENTRE
 HOME OF
 GOOD NEIGHBOURS SENIOR CENTRE
 WINNIPEG, MANITOBA

SHEET TITLE
 BUILDING SECTIONS
 EAST - WEST

SCALE	PROJECT NO.	SHEET NO.
AS SHOWN	PPRD 2006-065	A-3.2

DRAWING SHEET SIZE: A0 (1189mm x 841mm) PLOT 1:1