

- CONSTRUCTION NOTES:**
- ALL WORK AND MATERIALS IN ACCORDANCE WITH LATEST REVISION OF THE CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS.
 - ALL DIMENSIONS ARE TO BACK OF CURB.
 - ISOLATE MISCELLANEOUS ITEMS IN NEW CONCRETE WORKS AS PER SD-228C.
 - LEGAL PLAN AND UNDERGROUND INFORMATION FROM CITY OF WINNIPEG LBIS. CONTRACTOR TO VERIFY ALL UNDERGROUNDS IN THE FIELD.
 - CONTRACTOR TO TAKE PRECAUTIONARY STEPS TO AVOID DAMAGE FROM CONSTRUCTION ACTIVITIES TO TREES WITHIN THE LIMITS OF CONSTRUCTION.
 - LOCATION OF EXISTING SERVICES TO BE CONFIRMED IN THE FIELD BY THE CONTRACTOR.
 - CB LEADS TO BE INSTALLED AT MIN. 1.0% SLOPE OR AS DIRECTED BY CONTRACT ADMINISTRATOR.
 - LIMITS OF CURB AND SIDEWALK RENEWAL TO BE FINALIZED IN THE FIELD BY THE CONTRACT ADMINISTRATOR.
 - LIMITS OF BOULEVARD GRADING TO BE FINALIZED IN THE FIELD BY THE CONTRACT ADMINISTRATOR.
 - ADJUST ALL WATER VALVES, MANHOLES, CATCH BASINS, CATCH PITS, AND WATER SERVICE SHUT OFF VALVES TO GRADE.
 - ALL PRIVATE WALKWAYS ADJUSTED TO NEW SIDEWALK OR TOP OF CURB ELEVATION, AS REQUIRED.
 - MODIFIED BARRIER CURB TO BE CONSTRUCTED AT ALL INTERSECTION RADII AND BACK LANE RADII.
 - LAMP STANDARDS, HYDRO POLES AND ANCHORS THAT REQUIRE TEMPORARY SUPPORT, REMOVAL OR REPLACEMENT, ARE TO BE DONE AT THE EXPENSE OF THE CONTRACTOR, AS NECESSARY.
 - SEE SHEET 12 FOR TYPICAL PANDORA AVE. SECTION.

ENGINEERS GEOSCIENTISTS MANITOBA
 Certificate of Authorization
Dillon Consulting Limited (MB)
 No. 1789 Date: 2021/03/11

ABBREVIATIONS:


CONC	CONCRETE ROADWAY
ASP	ASPHALT ROADWAY
ASP OVLY	ASPHALT OVERLAY ROADWAY
GRAN	GRANULAR ROADWAY
PVS	PAVING STONE/BRICK
CSW	CONCRETE SIDEWALK
ASW	ASPHALT SIDEWALK
GSW	GRANULAR SIDEWALK
TYP	TYPICAL SIDEWALK
EX	EXISTING
MH	MANHOLE
WV	WATER VALVE
EL	ELEVATION
CB	CATCH BASIN
CP	CATCH PIT
CI	CURB INLET
CL	CONTROL LINE

METRIC

WHOLE NUMBERS INDICATE MILLIMETRES
 DECIMALIZED NUMBERS INDICATE METRES

WARNING

- IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:
- NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.
 - TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS SEE PROVINCIAL REGULATION 210/72 FOR DETAILS.
 - OBTAIN EXCAVATION PERMITS PRIOR TO CONSTRUCTION.

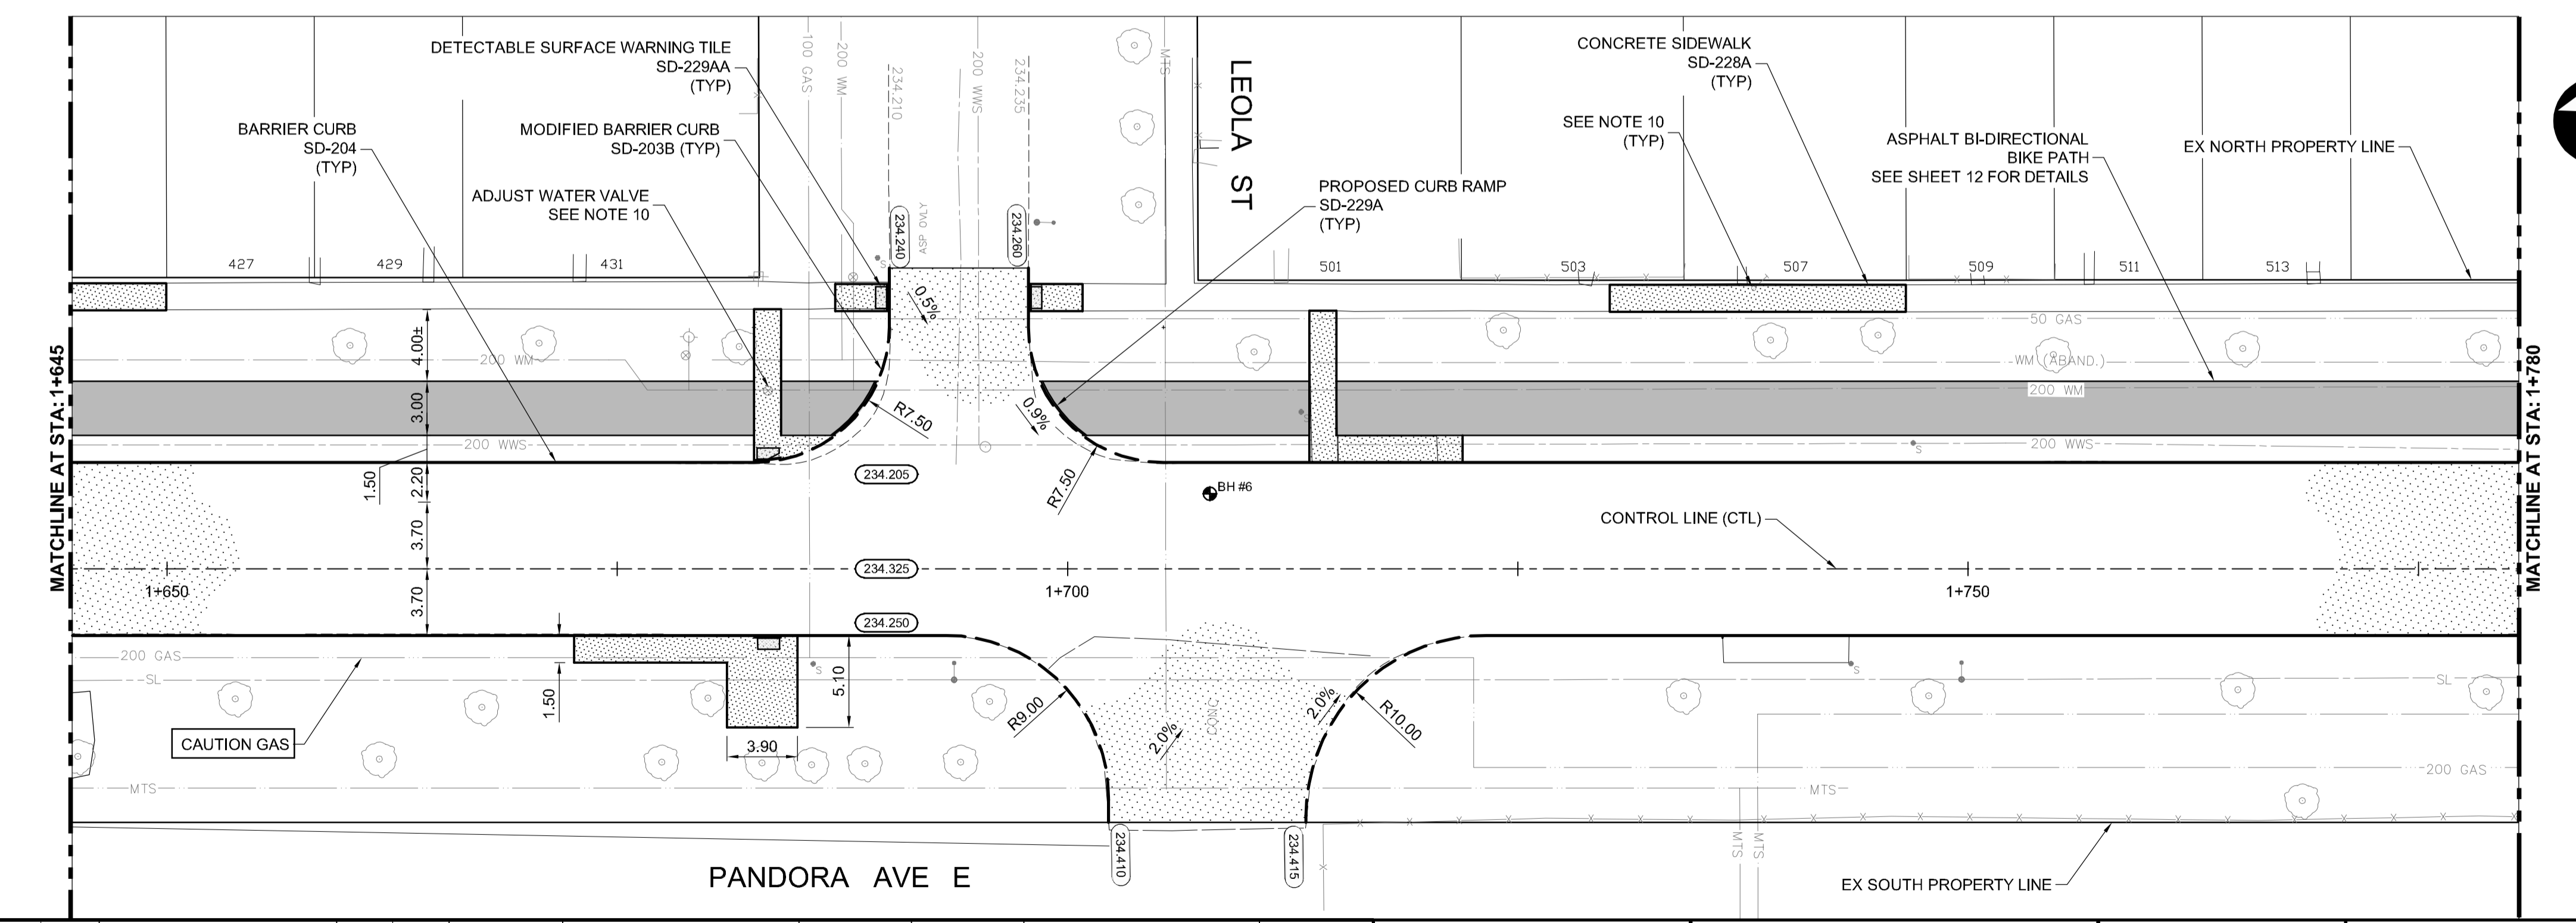

p:\Projects\2020\Documents\Projects\2021\4 Pavement Renew Day/Pandora\eg\eg\eg\2. Work\Drawings\Roadworks\Contract\

	HYDRANT		VALVE		CONCRETE		WATERMAIN
	MANHOLE		ASPHALT		SIDEWALK		LAND DRAINAGE SEWER
	CATCH BASIN		PAVING STONES		HYDRANT		WASTE WATER SEWER
	CATCH PIT		PAVEMENT REPAIR FABRIC		SURVEY BAR		VALVE
	WATERMAIN		PROPERTY LINE		PROFILE		NORTH/WEST GUTTER
	LAND DRAINAGE SEWER		ELEVATION		NORTH/WEST DITCH		SOUTH/EAST GUTTER
	WASTE WATER SEWER		TRAFFIC SIGNAL		SOUTH/EAST DITCH		CURB RAMP
	HYDRO		M.T.S.		DETECTABLE TILE		EXISTING
	M.T.S.		PROPOSED		LEGEND-PLAN		EXISTING
	GAS		PROPOSED		LEGEND-PROFILE		PROPOSED

UNDERGROUND STRUCTURES

APPROVED BY UGS 2021/03/11
 SUPV. U/G STRUCTURES DATE

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE, BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

DESIGNED BY	MRF
DRAWN BY	PMW
CHECKED BY	KP
APPROVED BY	TJP
HOR. SCALE	1:250
VERTICAL	1:10

DILLON CONSULTING

RELEASED FOR CONSTRUCTION

ENGINEER'S SEAL
 PROVINCE OF MANITOBA
 REGISTERED PROFESSIONAL ENGINEER
T.J. PETERS
 2021/03/11
 Member 22309

THE CITY OF WINNIPEG
 PUBLIC WORKS DEPARTMENT

2021 DAY/PANDORA PAVEMENT RENEWAL PROJECT
 PANDORA CONCRETE RECONSTRUCTION
 DAY STREET TO WAYOATA STREET

PANDORA AVE. EAST PLAN PROFILE
 (STA: 1+645 TO 1+780)

CITY DRAWING NUMBER P-3540-2021-09
 SHEET 09 OF 14
 CONSULTANT DRAWING NUMBER