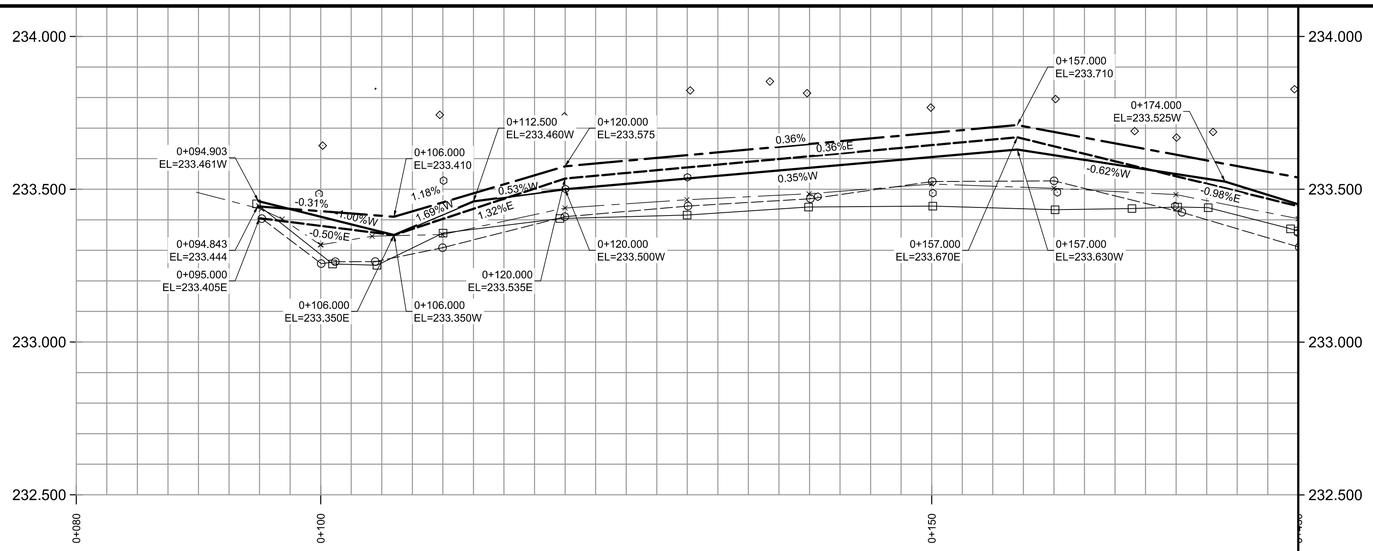

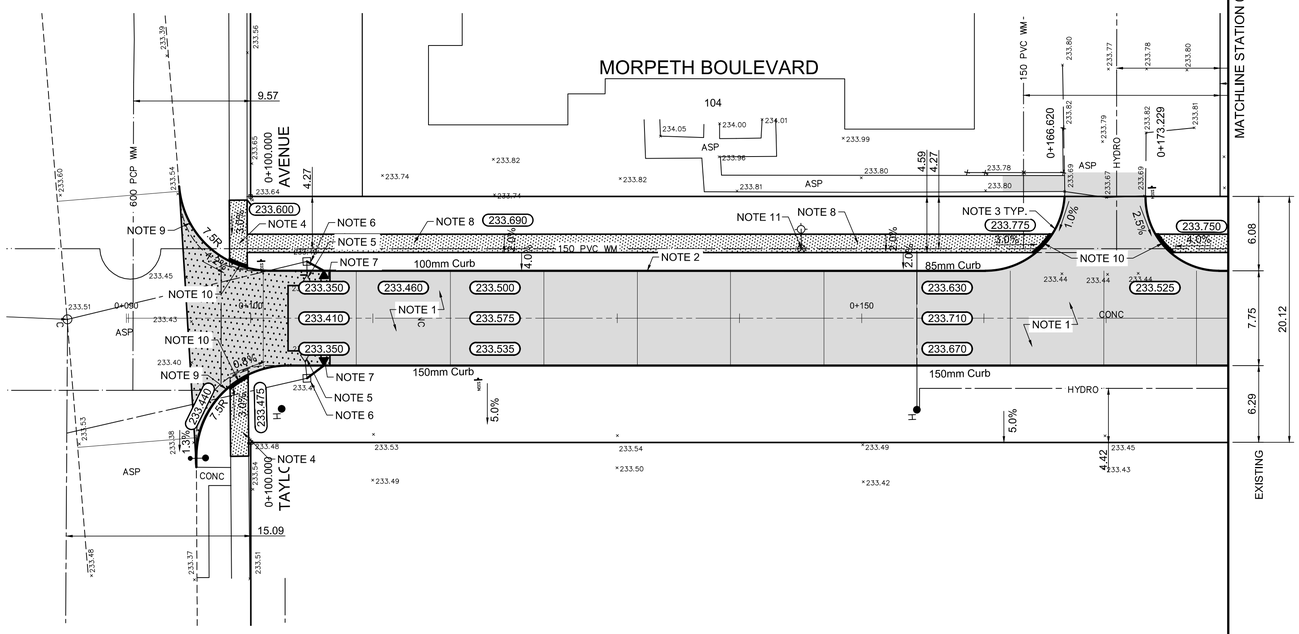

REFERENCE NOTES

A. PAVEMENT DIMENSIONS ARE TO BACK OF CURB
B. BASELINE IS CENTRE LINE RIGHT-OF-WAY
C. PROPERTY LINES OBTAINED FROM CITY OF WINNIPEG L.B.I.S., AND NO SCALE FACTOR WAS APPLIED
D. REFER TO AECOM FIELD BOOK NO. 4999

CONSTRUCTION NOTES

1. PLACE NEW ASPHALTIC PAVEMENT TYPE 1A (AVG THICKNESS 85mm)
2. REMOVE EXISTING BARRIER CURB AND CONSTRUCT NEW BARRIER CURB (100mm REVEAL HT. DOWELLED)
3. REMOVE EXISTING BARRIER CURB AND CONSTRUCT NEW MODIFIED BARRIER CURB (150mm HT. DOWELLED)
4. RENEW EXISTING 100mm CONCRETE SIDEWALK
5. REMOVE EXISTING CATCHPIT
6. ADJUST EXISTING MANHOLE/CATH BASIN TO GRADE
7. INSTALL NEW CATCHPIT (SD-023) c/w CURB AND GUTTER INLET (AP-011 & AP-012) AND CONNECT TO EXISTING CATCHBASIN
8. CONSTRUCT NEW 100mm CONCRETE SIDEWALK
9. CONSTRUCT NEW MODIFIED BARRIER CURB (150mm HT. INTEGRAL)
10. CONSTRUCT NEW CURB RAMP (10mm REVEAL HT. INTEGRAL)
11. ADJUST EXISTING WATER VALVE TO GRADE

APEGM
Certificate of Authorization
AECOM Canada Ltd.
No. 4671 Date:_____

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PROFILE	PROPOSED
150 mm W.M.	WATERMAIN	150 mm W.M.		HYDRO			℄ PROFILE	
	HYDRANT			M.T.S.			WEST GUTTER	
	VALVE			CONCRETE			EAST GUTTER	
300mm L.D.S.	LAND DRAINAGE SEWER	300mm L.D.S.		ASPHALT			N/W PROPERTY LINE	
250mm W.W.S.	WASTEWATER SEWER	250mm W.W.S.		PROPERTY LINE			S/E PROPERTY LINE	
	MANHOLE			SURVEY BAR				
	CATCH BASIN		235.750	ELEVATION	235.750			
	CATCH PIT		500ø	TREE				
	JUNCTIONS			SIDEWALK RAMP				
	CULVERT			CONCRETE SIDEWALK				
	GAS			FENCE				

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE — DATE

NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. 50-029 N.E. Cor. Taylor Ave. & Portsmouth Blvd., Tbl. on top or 0.05 m dia. x 2.4 m iron pipe, 3.7 m S. of N.L. of Taylor Ave. & on E.L. of Portsmouth Blvd. produced from the N.
ELEV. 233.514

NO.	REVISIONS	DATE	BY
0	ISSUED FOR TENDER	04/12/2018	BC
A	ISSUED FOR REVIEW	04/04/2018	BC

AECOM

DESIGNED BY	JT	CHECKED BY	BC/KWR
DRAWN BY	JC	APPROVED BY	
HOR. SCALE:	1:250	RELEASED FOR CONSTRUCTION BY:	
VERTICAL:	1:10		
DATE		DATE	

ENGINEER'S SEAL
PROVINCE OF MANITOBA
K.W. RAE
REGISTERED PROFESSIONAL ENGINEER
CONSULTANT DRAWING NO.
CT-15

Winnipeg
THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

2018 RESIDENTIAL STREET RENEWAL PROGRAM

MORPETH BOULEVARD - TAYLOR AVENUE TO NORTH END
CONCRETE PAVEMENT REHABILITATION
TAYLOR AVENUE TO STATION 0+180

CITY DRAWING NUMBER
SHEET 15 OF 18