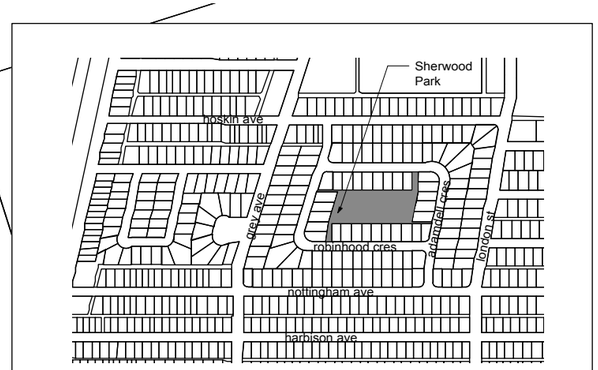

Context Plan

SOCCER FIELD

RESIDENTIAL PROPERTIES

SOD

OUTLINE OF PROPOSED PLAY AREA

RESIDENTIAL PROPERTIES

Timber Edging to be Removed (by others)

Swings to be Removed (by others)

Benches (x3) to be Removed (by others)

Safety Surfacing and Granular Pathway to be Excavated and Legally Disposed of (156 SM)

Park Sign, and Waste Receptacles to be Removed (by others)

Slide to be Removed (by others)

Playstructure and Independent Components to be Removed (by others)

Benches to be Removed (by others)

RESIDENTIAL PROPERTIES

0 10 20 30 m

CONTRACTOR TO CONFIRM ALL DIMENSIONS AND REPORT ANY DISCREPANCIES TO CONTRACT ADMINISTRATOR PRIOR TO CONSTRUCTION. LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

THE CITY OF WINNIPEG
Planning, Property and Development Department
Planning and Land Use Division
Unit 15 - 30 Fort Street, Winnipeg, MB, (R3C 4X5)

DESIGNED BY		CHECKED BY	
DRAWN BY	IL	APPROVED BY	
HORIZ. SCALE / VERT. SCALE	1:200		
DATE	DEC 2013		

MANAGER, PARK AND OPEN SPACES — DATE

MANAGER, PLANNING AND LAND USE DIVISION — DATE

DRAWING TITLE

Sherwood Park

PLAYGROUND REDEVELOPMENT

Existing Conditions and Removals

SITE ADDRESS 715 Robin Hood Crescent

DRAWING NO.

S.58-B

BID OPPORTUNITY NO.

130-2014